


STAGE B - TRAFFIC CONTROL PLAN

County Home Rd

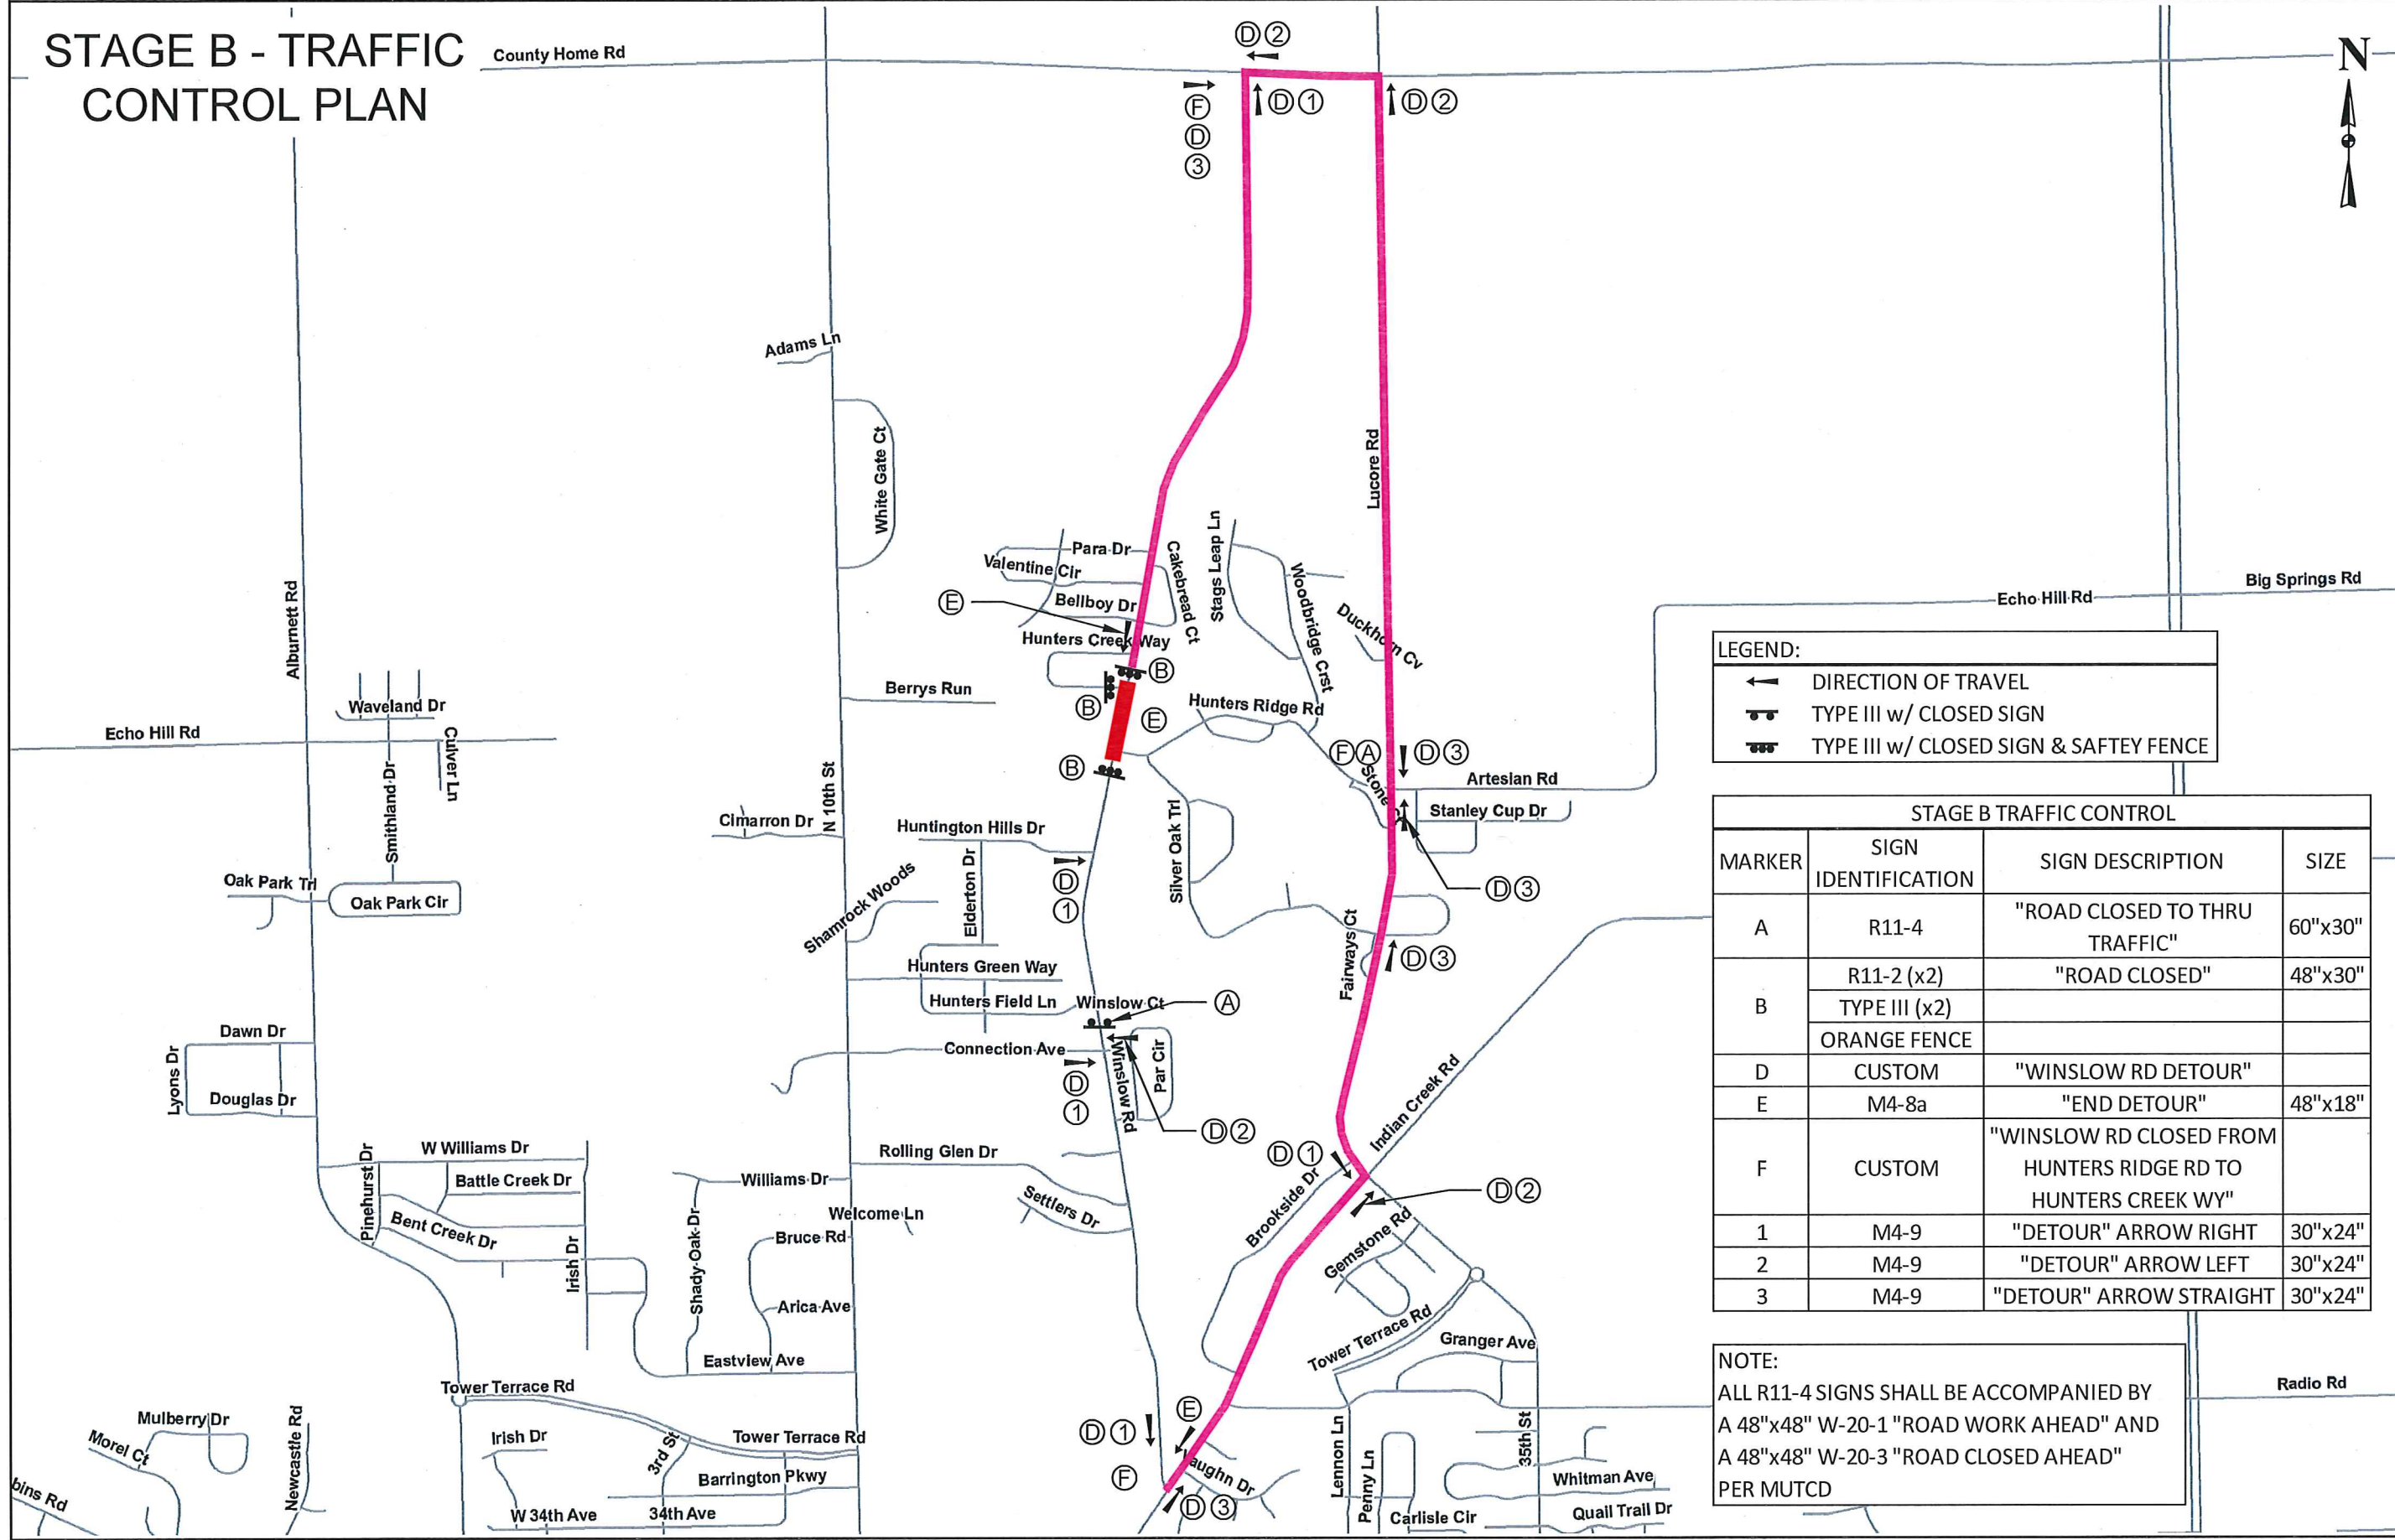

LEGEND:

- DIRECTION OF TRAVEL
- TYPE III w/ CLOSED SIGN
- TYPE III w/ CLOSED SIGN & SAFETY FENCE

STAGE B TRAFFIC CONTROL			
MARKER	SIGN IDENTIFICATION	SIGN DESCRIPTION	SIZE
A	R11-4	"ROAD CLOSED TO THRU TRAFFIC"	60"x30"
B	R11-2 (x2)	"ROAD CLOSED"	48"x30"
	TYPE III (x2)		
	ORANGE FENCE		
D	CUSTOM	"WINSLOW RD DETOUR"	
E	M4-8a	"END DETOUR"	48"x18"
F	CUSTOM	"WINSLOW RD CLOSED FROM HUNTERS RIDGE RD TO HUNTERS CREEK WY"	
1	M4-9	"DETOUR" ARROW RIGHT	30"x24"
2	M4-9	"DETOUR" ARROW LEFT	30"x24"
3	M4-9	"DETOUR" ARROW STRAIGHT	30"x24"

NOTE:
 ALL R11-4 SIGNS SHALL BE ACCOMPANIED BY A 48"x48" W-20-1 "ROAD WORK AHEAD" AND A 48"x48" W-20-3 "ROAD CLOSED AHEAD" PER MUTCD

Sheet Description: Construction Staging Stage B Traffic Control Plan
 City of Marion Engineering Department Marion, Iowa
 Project: 2016 Winslow Rd Reconstruction Project
 Scale: NTS
 Book: smk1
 Review: DDW
 Check: MDB
 Project No: J.05
 P-04-16